

## Liquid applied warm roof covering system - cold applied


### LiquiTOP Insulated System

Cold applied liquid, warm roof system suitable for new build and refurbishment applications.



	Function	Product name	Thickness (mm)	Weight (kg/m <sup>2</sup> )
1	Waterproofing	LiquiTOP PU applied in 2 coats, reinforced with Bauder LiquiTOP Glass Fibre Mat	1.8	2.9
2	Carrier membrane	BauderTEC DBR 06	0.6	0.6
3	Insulation	PIR FA-TE	140mm (or as specification)	4.2
4	AVCL	BauderTEC DBR 06	0.6	0.6

In-depth and up-to-date product specific technical data is available for each element within a system.  
Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

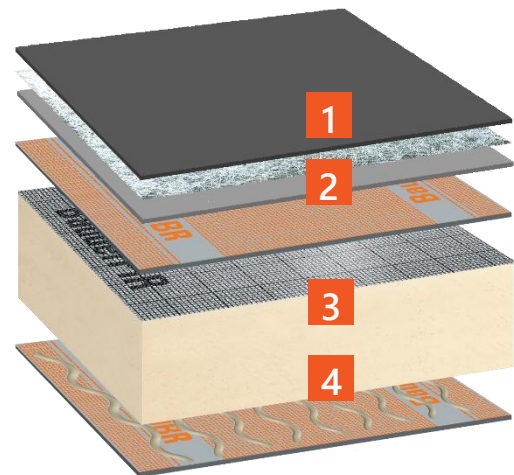

#### Characteristics of the system

- Single pack polyurethane system.
- Seamless cold applied liquid.
- UV resistant throughout the whole membrane.
- Monomer stripped isocyanate prepolymer.
- Comprehensive guarantee packages to meet project requirements.

#### Accreditations and approvals



# System summary

System variations are available to the specifier so that a tailored solution meets the needs of the building. The selection of products should be confirmed with our technical department to ensure suitability for the individual construction requirements of the flat roof.

E: [technical@bauder.co.uk](mailto:technical@bauder.co.uk)

T: 01473 257671

## OPTIONS AVAILABLE

In-depth and up-to-date product specific technical data is available for each component within a system. Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

<b>Membrane finish colours</b> LiquiTOP PU Dark Grey (Approx. RAL 7011) is suggested as the top layer	<b>Dark Grey</b> RAL 7011 (Approx.)		<b>Mist Grey</b> RAL 7040 (Approx.)	
--	--	---	--	---

Alternative AVCL	Thickness (mm)	Weight (kg/m <sup>2</sup> )
BauderTEC KSD FBS	2.5	2.5

Insulation options	Thickness (mm)	Weight (kg/m <sup>2</sup> )
PIR FA Tapered	Varies	Varies
BauderVIP	As specification	Varies
BauderROCK flat/tapered	As specification	Varies
BauderGLAS flat/tapered	As specification	Varies

## System fire performance

The system arrangements tested, verified, and that achieve industry standards for fire performance are defined in the relevant BBA certificate. Please ensure you are aware of which permutations currently have a stated performance against fire by viewing and downloading the BBA certificate from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

Bauder continually tests its systems for fire performance and so if the permutation of products you are specifying is not stated in our latest BBA certificate, please contact [technical@bauder.co.uk](mailto:technical@bauder.co.uk) for clarification.