

BAUDER GRP-TRIM SYSTEM


Bauder GRP-Trim is a simple to install, maintenance free GRP edge trim for use with bituminous flat roof systems.

Manufactured from glass reinforced polyester, with a far lower coefficient of thermal expansion than aluminium or steel, Bauder GRP-Trim has a higher strength to weight ratio than its metal counterparts. This eliminates the problem of roof membranes tearing at the trim joints. It is also corrosion resistant.

Supplied in 2.5m lengths for easy cutting on site, the Bauder GRP-Trim is available in a choice of profiles and colours, to provide a neat, unobtrusive finish to the roof edge.

Benefits

- Simple to handle, work and install
- High strength to weight ratio
- Corrosion resistant
- Negligible coefficient of expansion
- Competitively priced
- Maintenance free
- Neat, unobtrusive appearance

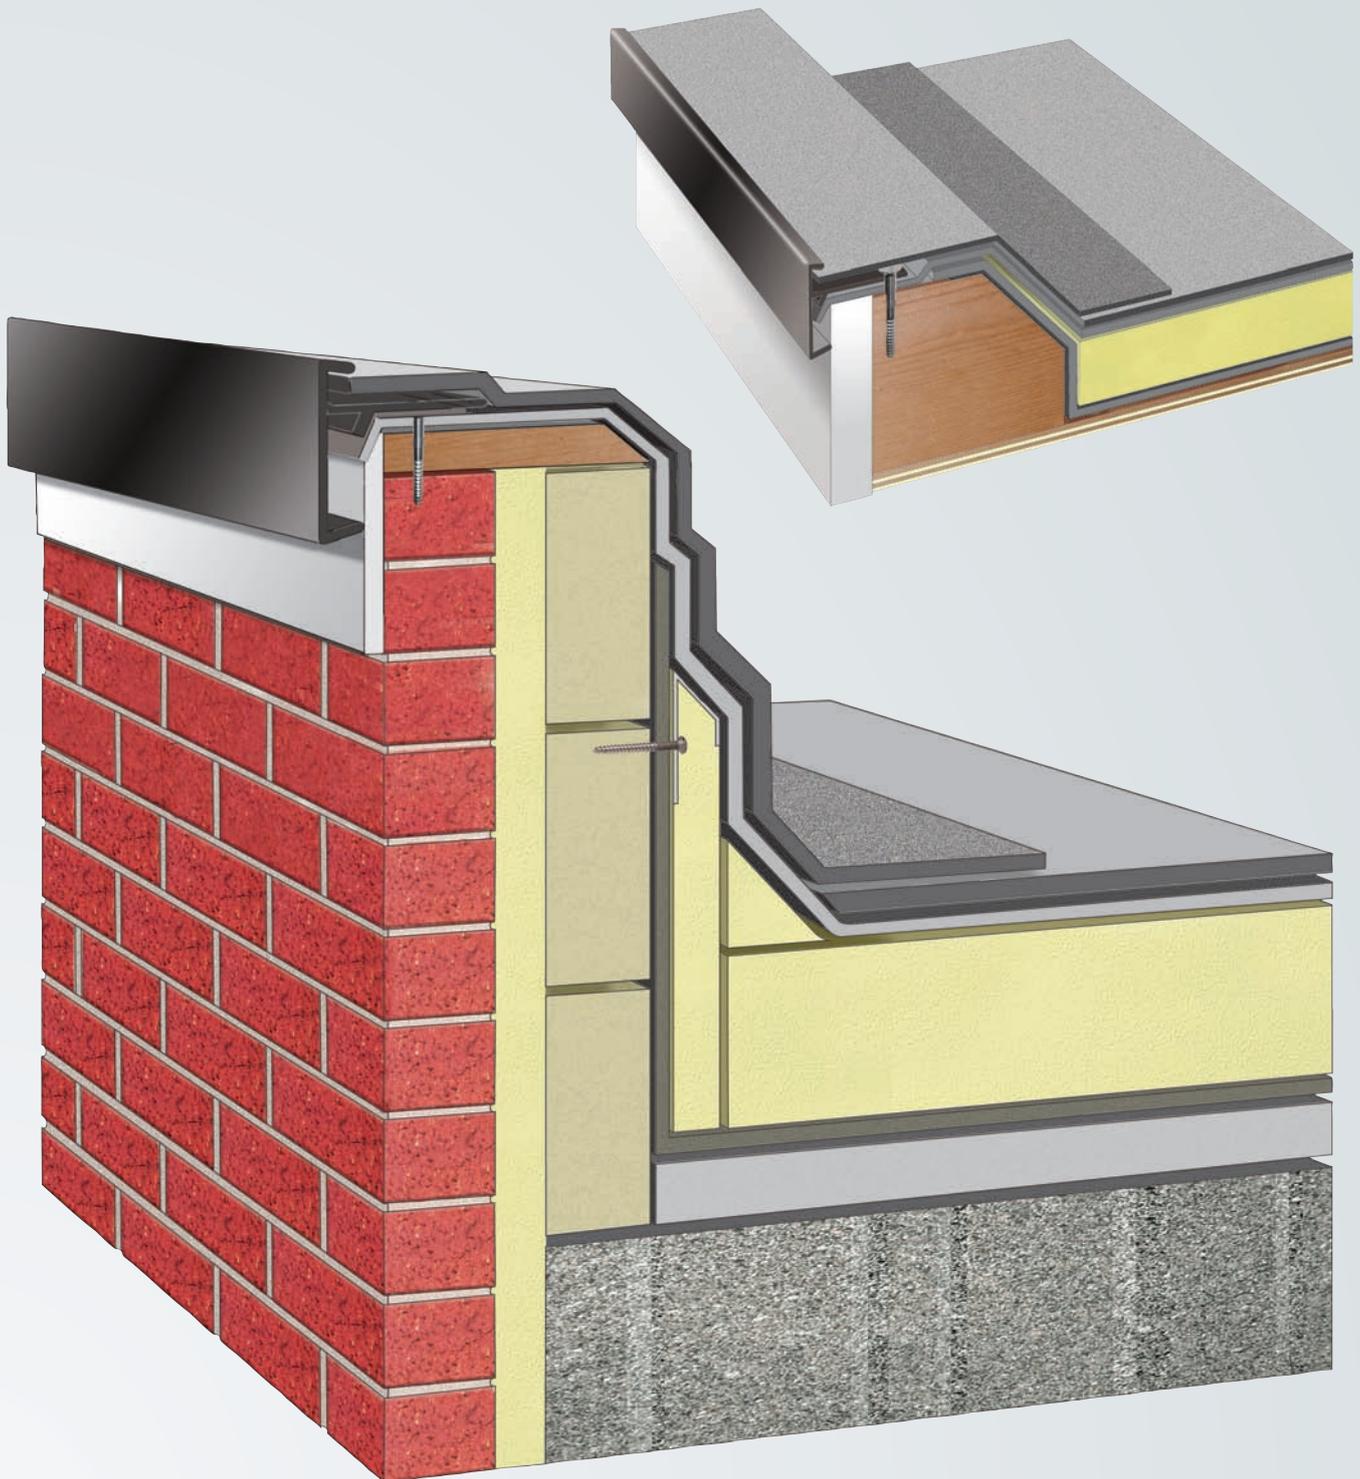

TECHNICAL DATA

Product

Composition:

Made from pultruded glass fibre reinforced polyester resin.

Performance

Due to the composition of Bauder GRP-Trim, it has a negligible coefficient of thermal expansion, will not corrode, rust or dent and is not affected by atmospheric pollution. Maintenance free.

Colours

Available ex-stock in grey or black. Other colours available on application.

Profiles and Dimensions

Illustrations below show sizes available. All dimensions are in mm. Pre-formed 90 degree angles (internal and external) are also available to avoid mitre cutting on site.

Sitework

Cutting

All drilling and cutting can be carried out on site using traditional tools.

General Jointing and Fixing


Bauder GRP-Trim should be fixed at maximum 300 mm centres into timber grounds or suitable plug inserts, using woodscrews, with the ends of each length firmly secured. It is recommended that type 6 is also face fixed.

All lengths should be close butt jointed, using internal jointing sleeves.

Supply

Delivery

Bauder GRP-Trim is supplied in packs containing 10 No. 2.5m lengths and 10 No. internal jointing sleeves (except type 6 which contains 5 No. lengths and 5 No. internal jointing sleeves). Packs can be split.

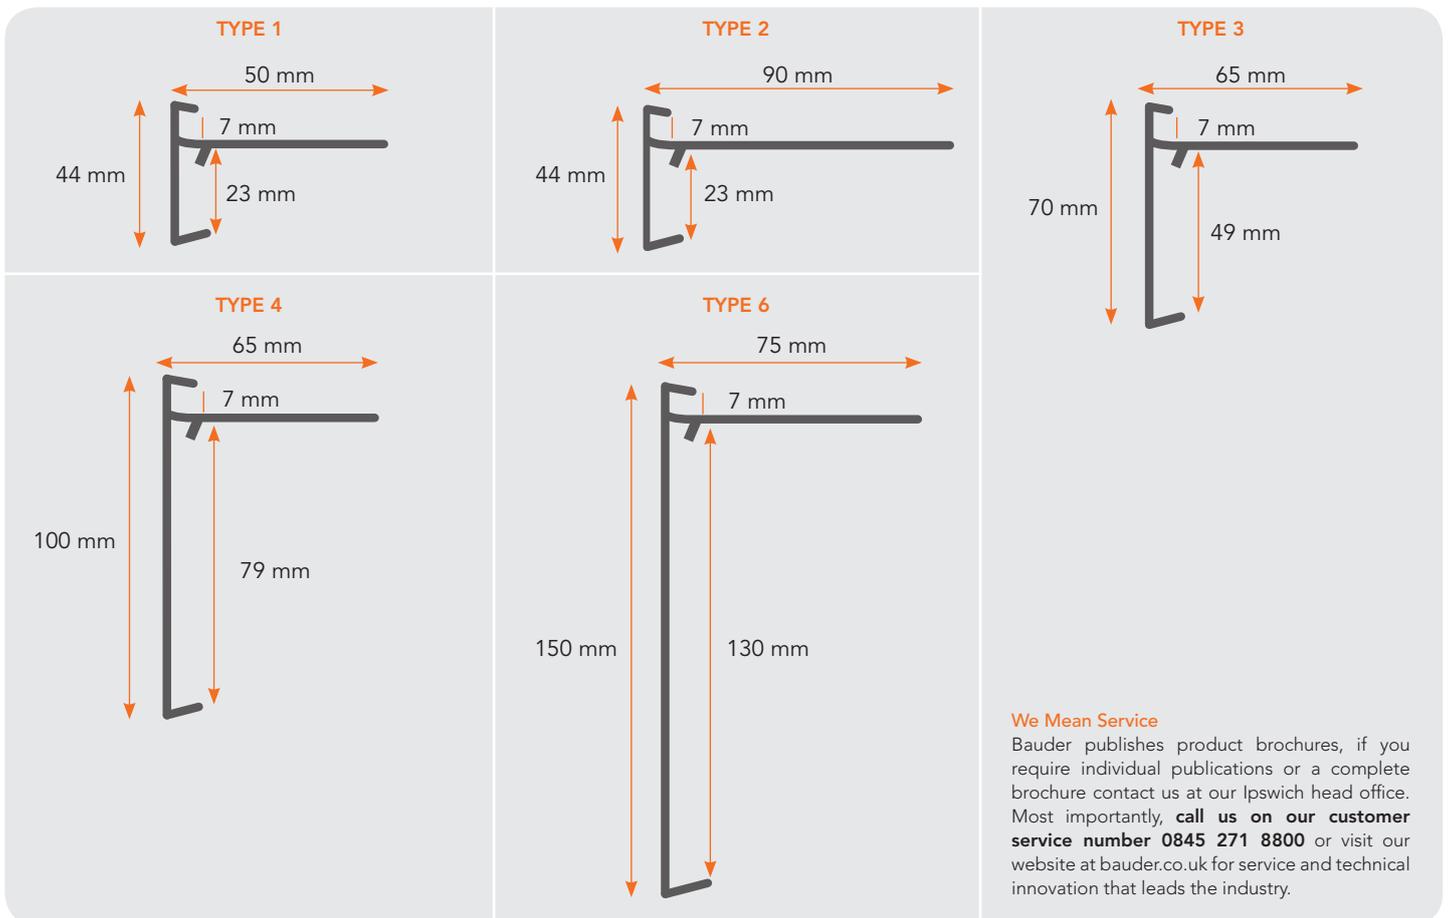

All quoted measurements are subject to manufacturing tolerance + or - 1 mm

BAUDER

UNITED KINGDOM

Bauder Limited
70 Landseer Road, Ipswich, Suffolk IP3 0DH,
England
T: +44 (0)1473 257671 E: info@bauder.co.uk
bauder.co.uk

IRELAND

Bauder Limited
O'Duffy Centre, Carrickmacross, Co. Monaghan,
Ireland
T: +353 (0)42 9692 333 E: info@bauder.ie
bauder.ie