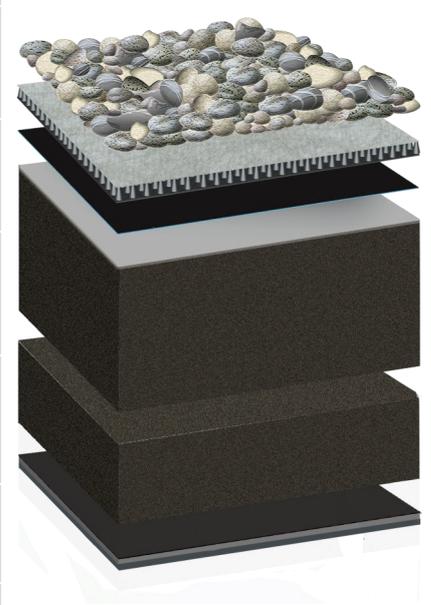


## Bauder Bakor Hot Melt System

### Inverted Ballasted inc. BauderGLAS Inverted Insulation

Hot liquid applied waterproofing system for use in Inverted and Cold Roof situations. Suitable in both New Build and Refurbishment situations. Can be used on various substrates and is ideal as a waterproofing beneath paved, ballasted, green and brown and biosolar roof situations.

	Function	Product	Thickness	Weight	
1	Ballast	Installed to achieve a permanent minimum load of 80kg/m <sup>2</sup> .	50mm	80kg/m <sup>2</sup>	
2	BauderGREEN DE NF 10	Lightweight, multi directional protection/	10mm	9kg/m <sup>2</sup> (saturated)	
3	BauderJFRI WFRL	Vapour permeable polypropylene spun boned membrane	0.45mm	0.1kg/m <sup>2</sup>	
4	BauderGLAS Inverted Insulation	High performance rigid cellular glass insulation with pre-applied inorganic coating	160mm	16kg/m <sup>2</sup>	
5	BauderGLAS T3+	High performance rigid cellular glass insulation	80mm	8kg/m <sup>2</sup>	
6	AP1 Access	Fully bonded into the uppermost layer of the 790-11	1.5mm	1.8kg/m <sup>2</sup>	
7	790-11 Hot Melt Waterproofing	Hot applied, rubberised bitumen with Polyester Reinforcement layer for a monolithic fully bonded system.	6.2mm	6.5kg/m <sup>2</sup>	
			295.15mm	126.4kg/m <sup>2</sup>	

In-depth and up-to-date product specific technical data is available for each element within a system.  
Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

#### Characteristics of the system

- Monolithic waterproofing system—no laps
- 100% bond to deck surface
- Lasts the lifetime of the roof
- Safe2Torch compliant detailing on or near combustible construction materials.

#### Accreditations and approvals



## Bauder Bakor Hot Melt System

### Inverted Ballasted inc. BauderGLAS Inverted Insulation

System variations are available to the specifier so that a tailored solution meets the needs of the building. **The selection of products should be confirmed with our technical department to ensure suitability for the individual construction requirements of the flat roof.**

E: [technical@bauder.co.uk](mailto:technical@bauder.co.uk)

T: 01473 257671

#### OPTIONS AVAILABLE

In-depth and up-to-date product specific technical data is available for each component within a system. Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

Access/Protection Sheet alternatives	Thickness	Weight
AP2	4.2mm	5.0kg/m <sup>2</sup>
K4E Charcoal Grey	4.2mm	5.6kg/m <sup>2</sup>
K4E Grey Slate	4.2mm	5.0kg/m <sup>2</sup>
K4E Brown	4.2mm	5.0kg/m <sup>2</sup>

Insulation to achieve 0.16 on a concrete deck	Thickness	Weight
BauderGLAS Inverted	240mm	24.0kg/m <sup>2</sup>
BauderJFRI PREMIUM+	185mm	5.55kg/m <sup>2</sup>
BauderJFRI (300)	195mm	7.80kg/m <sup>2</sup>
BauderXPS (300)	220mm	6.60kg/m <sup>2</sup>

#### System fire performance

The system arrangements tested, verified, and that achieve industry standards for fire performance are defined in the relevant BBA (pending for BauderGLAS Inverted) certificate. Please ensure you are aware of which permutations currently have a stated performance against fire by viewing and downloading the BBA certificate from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

Bauder continually tests its systems for fire performance and so if the permutation of products you are specifying is not stated in our latest BBA certificate, please contact [technical@bauder.co.uk](mailto:technical@bauder.co.uk) for clarification.